18Jun2021

Scenery Carriers 1

SCENERY CARRIERS for ADC 1700 Track:

Designed to support scenery, masking flats, door panels, etc. using ADC #1700 or equal track channel. Track must be adequately supported. Carriers are usually used in pairs or groups to support larger weight loads. ADC tracks ship from Baltimore, MD or Allentown, PA..


| Catalog No. 1700 | Description Track channel, 14 ga. galv. steel, in lengths up to 24'. Longer tracks may be assembled using track splices. Size 1.75" wide by 2" high, weight | Price |
|---------------------|--|-----------|
| 114700DI | 27 oz/ft\$ | 11.32/ft |
| #1700BL | Track channel, steel with black finish. Size 1.75" wide by 2" high, weight 27 oz/ft\$ | 13.85/ft |
| 1700ABL | Track channel, 12 ga. extruded aluminum with black finish, in lengths up to 24'. Longer tracks may be assembled using track splices. Size | |
| #1740 | 1.75" wide by 2" high, weight 9 oz/ft\$ Scenery carrier for #1700 track has 4 neoprene tired ball-bearing wheels, clamps for rope or cable, and metal back plate for attaching mask- ing flats or sliding scenic panels constructed of 3/4" lumber. <i>Very quiet operation</i> . Working load is 40 pounds. Metal plate is aprox. 4" wide | 15.64/ft. |
| | by 3.25" high and has 5 holes 1/4" dia\$ | 83.55 |
| #1751 | Sliding door carrier for #1700 track, with nylon tired ball-bearing wheels, mounting plate and clamps for rope or cable. Adjustable center bolt permits adjusting height or levelness of door or panel without removing from carrier. Working load is 75 pounds. Mounting plate is 3" x 1.25" x | 170.40 |
| #1751A | .25" thick with 4 holes 3/16" dia. on top\$ Basic scenery carrier for #1700 track consists of square steel tube body with 4 nylon tired ball-bearing wheels and a grade 5 welded 3/8" threaded center bolt to attach scenery. Working load is 150 pounds. Aprox. size is 4.5" wide. Bolt extends 2" below track, with 1" threaded\$ | |


SCENERY CARRIERS for H&H 110 and 210 Tracks:


Designed to support scenery, masking flats, door panels, etc. using H&H Specialties #110S, 110A, 210S or equal track channel. Track must be adaquatedly supported. Carriers are usually used in pairs or groups to support larger weight loads. H&H Tracks ship from South El Monte, CA.

| Catalog No. | Description | Price |
|----------------|--|-------|
| #110S #110A | Track channel, 16 ga. galv. steel, in lengths up to 24'. Longer tracks may be assembled using track splices. Size 1.75" wide by 2" high\$ Track channel, 0.08" thick extruded aluminum, stock lengths of 20' and 24' Longer tracks | POR |
| #210B | may be assembled using track splices. Size 1.75" wide by 2" high\$ Track channel, 16 ga. steel with black powder coat finish. Stock lengths of 16', 20' and 24'. | POR |
| #HH139BS | Longer tracks may be assembled using track splices. Size 1.75" wide by 2" high\$ Scenery carrier for H&H tracks, has solid steel | POR |
| ####100EC | body with 4 ball-bearing solid steel wheels. A 3/8" forged steel eye bolt with pinned hex nut permits the eye to swivel. Eye bolt extends down 2-5/8" below bottom of track. Rated for 150 lbs working load\$ | Disc. |
| #HH140BS | Same as #HH139S, but with 1/2" dia. threaded mounting bolt that can swivel. Mounting bolt is milled flat on two sides to fit 3/8" wrench to facil- itate attaching and leveling scenery. Bolt ex- tends down 1-3/4" below bottom of track. Rated | 2100. |
| | for 150 lbs working load\$ | Disc. |










#1740

#1751



#1751A



06Jan2017


Scenery Carriers 2

11A

SCENERY CARRIERS for ADC 2800 track:

Designed to support scenery, masking flats, door panels, etc. using ADC #2800 or equal track channel. Track must be adequately supported. Carriers are usually used in pairs or groups to support larger weight loads. ADC tracks ship from Baltimore, MD or Allentown, PA

| Catalog No. 2800 | Description |
|---------------------|---|
| 2800BL | assembled using track splices. Size 2-5/8" w by 2-3/4" h, weight 44 oz/ft\$ 15.44/ft. Track channel, 14 ga. black finish steel, up to 24' continuous sections. Longer tracks may be assembled using track splices. Size 2-5/8" w by |
| 2800ABL | 2-3/4" h, weight 44 oz/ft\$ 23.88/ft Track channel, 12 ga. extruded aluminum with black finish, in lengths up to 24'. Size 2-5/8" |
| #2840 | wide by 2-3/4" high, weight 15 oz/ft\$ 22.10/ft Masking panel or scenery carrier for #2800 track, with four nylon tired ball bearing wheels, 4" wide by 1/4" thick mounting plate, and cord clamps. Mounting plate extends 3-7/8" down |
| #2861 | below track. Working load is 150 pounds \$ 213.72 Sliding door carrier for #2800 track, with nylon tired ball-bearing wheels, mounting plate and clamps for rope or cable. Adjustable center bolt permits adjusting height or levelness of door or panel without removing from carrier. Working load is 100 pounds. Mounting plate is 3" x 1.25" |
| #2861A | x .25" thick with 4 holes 3/16" dia. on top\$ 303.88 Basic scenery carrier for #2800 track consists of square steel tuber body with 4 nylon tired sealed ball-bearing wheels and a grade 5 welded 3/8" threaded center bolt to attach scenery. Working load is 100 pounds. Aprox. size is 4.5" wide. Bolt extends 2" below track, with 1" threaded\$ 96.67 |







#2840

#2861



#2861A

Scenery Carriers 3

11B


SCENERY CARRIERS for H&H 410 or 410A Tracks:

Designed to support scenery, masking flats, door panels, etc. using H&H Specialties #410S, 410A, 410SB or equal track channel. Track must be adequately supported. Carriers are usually used in pairs or groups to support larger weight loads. H&H Tracks ship from South El Monte, CA.

| 0 0 | | |
|---|---|--|
| Catalog No. #410S | Description | |
| | 16', 20', 24', and 26'. Longer tracks may be as- sembled using track splices. Size 2-5/8" wide by 2-3/4" high\$ POR | |
| #410SB | Track channel, 14 ga. semi-gloss black powder coat finish steel. Stock lengths 20', and 24". | |
| #410A | Longer tracks may be assembled using track splices. Size 2-5/8" wide by 2-3/4" high\$ POR Track channel, 0.08" thick extruded natural fin- | |
| ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, | ish aluminum. Stock lengths 20', and 24". Lon- ger tracks may be assembled using track | |
| #HH439BS | splices. Size 2-5/8" wide by 2-3/4" high\$ POR Scenery carrier for H&H tracks, has solid steel body with 4 ball-bearing solid steel wheels. A | |
| | 3/8" forged steel eye bolt with pinned hex nut permits the eye to swivel. Eye bolt extends | |
| #HH440BS | down 2-5/8" below bottom of track. Rated for 150 lbs working load\$ Disc. | |
| #ПП440ВЗ | Same as #HH439S, but with $\frac{1}{2}$ " dia. threaded mounting bolt that can swivel. Mounting bolt is milled flat on two sides to fit 3/8" wrench to facil- | |
| | itate attaching and leveling scenery. Bolt ex- tends down 1-3/4" below bottom of track. Rated | |
| #HH449 | for 150 lbs working load\$ Disc. Scenery carrier has 4 quiet running urethane tired sealed ball bearing wheels, solid steel | |
| | body, two 7/16" dia. nylatron guides bearings to keep carrier centered in track, and 5/16" forged | |
| | steel eye bolt with pinned hex nut permits the eye to swivel. Eye bolt extends down 2" below | |
| #HH450 | bottom of track. Working load is 200 pounds \$ 139.20 Scenery carrier is same as #HH449 but has ½" dia. threaded mounting bolt that can swivel. | |
| | Non-swivel mounting bolt is milled flat on two sides for clearance in track slot and pinned to | |
| #HH450A | prevent turning. Bolt extends down 1-5/8" be- low bottom of track. Rated for 200 lbs wk load\$ 119.20 Improved version of #HH450 scenery carrier | |
| | has longer body with 2 additional pair of wheels on top to prevent tipping, nylatron guide rollers, | |
| | and 3/8 bolt. Rated for 200 lbs working load \$ 290.16 | |


REALLY USEFUL CARRIER:

Scenery carrier nicknamed the" Really Useful #HH451 Carrier" has 4 urethane tired ball-bearing wheels on black anodized aluminum body. Very quiet operation. Includes 2 vertical nylatron roller bearings to keep unit centered in track, 3/8" safety bolt installed to prevent possibility of single point failure, and rope clips for cord operation. Multiple mounting holes for use of bolts, shackles, or turnbuckles. Room enough to mount a 4" square electrical box. Body is 3/" thick by 5-7/9" wide, and extends down 5-7/16" below bottom of track. Rated for 200 pound working load\$ 179.36 #HH451A Same as #451 but includes third pair of wheels at top of carrier body to help prevent carrier from tipping up when an unbalanced load is supported by two or more carriers, or when being moved by cord operation. Does not include safety bolt. The #HH451A carrier can not be used with a #HH427 track ceiling splice because of the bolts that hold the splice to the track will interfere with the top wheels \$ 227.92

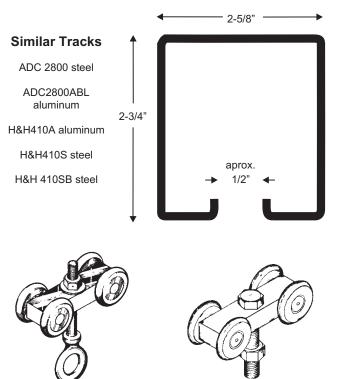

#HH439BS


#HH440BS



Nylatron roller

#HH449

#HH450

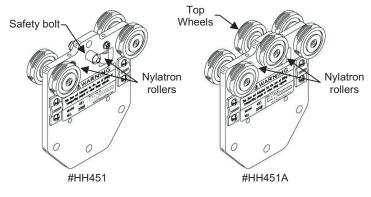

For technical details and application illustrations for the HH451 and HH451A, click here.

Theatre Service & Supply Corp. 10004 F Pulaski Hwy., Baltimore, MD 21220 USA Pho. 410-686-1398 Fax. 410-574-2417 28Dec2016

SCENERY CARRIERS for ADC Track:

Designed to support scenery, masking flats, door panels, etc. using ADC, H&H, or equal track channel. Track must be adequately supported. Carriers are usually used in pairs or groups to support larger weight loads.

| Catalog No. #5000 | Description Price PATRIARC Track channel, 7 ga. natural finish extruded aluminum, in lengths up to 20'. Also available with optional black finish. Longer tracks may be assembled using track splices. Track can be factory curved (additional cost) to minimum radius of 2', continuous arcs, or serpentine layouts. Size 1.5/8"" wide by 3-1/4" high, weight 1.5 lbs/ft. \$ 17.05/ft |
|----------------------|---|
| #5000BL | Black finish track channel\$ 25.47/ft |
| #5051 | Scenery panel carrier for PATRIARC track for walk-a-long applications. Black painted steel with 4 nylon tired ball-bearing wheels. Includes bolt and threaded mounting plate that can be adjusted up and down to level the scenery panel. Used in pairs. Size approx. 5-1/16" long by 2-3/16" wide, weight 2 lbs 6 oz. Max working load is 150 pounds\$ 135.05 |
| #1400 | RIG-I-FLEX Track channel, 11 ga. natural fin- ish extruded aluminum, in lengths up to 20'. Also available with optional black finish. Longer tracks may be assembled using track splices. Track can be factory curved (additional cost) or on site using optional track bending tools to minimum radius of 2', continuous arcs, or ser- pentine layouts. Size 1"" wide by 2.5" high, weight 10oz/ft\$ 9.01/ft |
| #1400BL | Black finish track channel\$ 12.59/ft |
| #4200 #4200BL | TRIPL-I-TRAC Track channel, 7 ga. natural fin- ish extruded aluminum, in lengths up to 20'. Also available with optional black finish. Longer tracks may be assembled using track splices. Track can be factory curved (additional cost) or on site using optional track bending tools to minimum radius of 2', continuous arcs, or ser- pentine layouts. Size 1"" wide by 3-3/8" high, weight 1 lb-8oz/ft\$ 17.00/ft Black finish track channel\$ POR |
| #4200DL | |
| #4251 | Scenery panel carrier for #1400 or #4200 track channel for walk-a-long applications. Black painted steel with 4 nylon tired ball-bearing wheels. Includes bolt and threaded mounting plate that can be adjusted up and down to level the scenery panel. Used in pairs. Size approx. 4-3/8" long by 1.5" wide, weight 1 lbs 5 oz. Max working load is 30 pounds per carrier\$ POR |








11C

#5000 Track



#4200



#4251